

ZERTIFIKAT ◆ CERTIFICATE ◆ 認證證書 ◆ CERTIFICADO ◆ CERTIFIKAT ◆ CERTIFICATE ◆ CERTIFICAT



Product Service


CERTIFICATE

No. Z2 099333 0041 Rev. 05

Holder of Certificate: LONGi Green Energy Technology Co., Ltd.

No. 388, Middle Hangtian Road
Chang'an District
710100 Xi'an City, Shaanxi
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

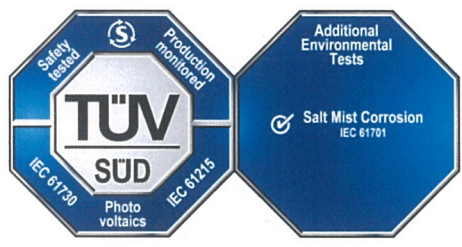

Product:

Crystalline Silicon Terrestrial Photovoltaic (PV) Modules
Mono-Crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition the certification holder must not transfer the certificate to third parties. See also notes overleaf.

Test report no.: 704061802008-06

Valid until: 2025-03-09

Date, 2020-03-11

(Zhulin Zhang)



Product Service

CERTIFICATE

No. Z2 099333 0041 Rev. 05

Model(s):

LR6-72BP-xxxM, (xxx=350 to 380 in step of 5)
 LR6-60BP-xxxM, (xxx=290 to 315 in step of 5)
 LR6-72DG-xxxM, (xxx=330 to 360 in step of 5)
 LR6-60DG-xxxM, (xxx=275 to 300 in step of 5)
 LR6-72PD-xxxM, (xxx=345 to 370 in step of 5)
 LR6-60PD-xxxM, (xxx=290 to 305 in step of 5)
 LR6-72HBD-xxxM, (xxx=360 to 395 in step of 5)
 LR6-60HBD-xxxM, (xxx=300 to 325 in step of 5)
 LR6-72HIBD-xxxM, (xxx=360 to 380 in step of 5)
 LR6-60HIBD-xxxM, (xxx=300 to 325 in step of 5)
 LR6-78HIBD-xxxM, (xxx=395 to 410 in step of 5)
 LR6-72HIBD-xxxMC, (xxx=360 to 380 in step of 5)
 LR6-60HIBD-xxxMC, (xxx=300 to 325 in step of 5)
 LR6-78HBD-xxxM, (xxx=395 to 410 in step of 5)
 LR6-72HPD-xxxM, (xxx=360 to 385 in step of 5)
 LR6-60HPD-xxxM, (xxx=300 to 320 in step of 5)
 LR6-72HBD-xxxMC, (xxx=360 to 395 in step of 5)
 LR6-60HBD-xxxMC, (xxx=300 to 325 in step of 5)
 LR6-72OPD-xxxM, (xxx=370 to 410 in step of 5)
 LR6-60OPD-xxxM, (xxx=325 to 345 in step of 5)
 LR6-72MBD-xxxM, (xxx=365 to 385 in step of 5)
 LR6-60MBD-xxxM, (xxx=305 to 320 in step of 5)
 LR6-72MPD-xxxM, (xxx=365 to 385 in step of 5)
 LR6-60MPD-xxxM, (xxx=305 to 320 in step of 5)
 LR4-72HBD-xxxM (xxx=415 to 455 in step of 5)
 LR4-60HBD-xxxM (xxx=345 to 375 in step of 5)
 LR4-72HIBD-xxxM (xxx=415 to 445 in step of 5)
 LR4-60HIBD-xxxM (xxx=345 to 360 in step of 5)
 The suffix BP is meaning double glass PV modules with bifacial solar cells,
 the suffix DG is meaning double glass modules,
 the suffix PD is meaning double glass PV modules with PERC cells,
 the suffix HBD, HIBD is meaning double glass PV modules with bifacial half solar cells
 the suffix OPD is meaning double glass shingling module types,
 the suffix HPD is meaning double glass PV modules with PERC half solar cells,
 the suffix MBD is meaning double glass PV modules with bifacial MBB cells,
 the suffix MPD is meaning double glass PV modules with MBB cells.
 xxx is standing for rated output power at STC.

Parameters:

Severity of Salt mist test:	Severity 1
Safety Class:	Class II
Maximum System Voltage:	1500 V DC
Construction:	Framed or frameless, with Junction box, cable and connector.
Fire Safety Class:	Class C according to UL790

Tested according to:

IEC 61701:2011
 IEC 61215-1:2016
 IEC 61215-1-1:2016
 IEC 61215-2:2016
 IEC 61730-1:2016
 IEC 61730-2:2016

Production Facility(ies):

001192, 099605, 096558, 002875, 090968, 099626,
 099606, 102892, 097323, 103410, 103841

TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD
 ZERTIFIKAT • CERTIFICATE • 認證證書 • CERTIFICADO • CERTIFICAT