

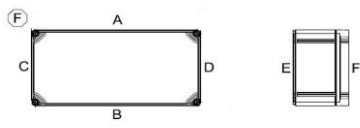

General ordering data

Type	Order No.
EB CAJAS BACKUP - FRONIUS	8000077634

Technical data

General data	
Enclosure version	Cabinet Schneider NSYPLM54G Wall-mounting enclosure polyester monobloc IP66 H530xW430xD200mm
Mechanical Impact strength:	IK10
IP Degree protection:	IP 66
Wall thickness	-
Mounting plate	Plain mounting plate H500xW400mm made of galvanised sheet steel
Earth continuity plate	Not applicable
Earth stud	Not applicable
Gland plate specifications	Not applicable
Label setting	-
Document holder	NSYDPA4 Document holder 230x247x23MM
Fixing lug for wall mounting	Set of 4 polyamid wall mounting lugs (NSYPFPLMG) Hinge: Not applicable
Control elements	Not applicable
Cable entries	
Cable Glands	5x VG M20-K67 10-14 M 20, 10 mm, OD min. 10 - OD max. 14 mm, Polyamide 6
Plugs	
Not applicable	
Compensating elements	
Not applicable	
Terminal strip 1	
Horizontal installed	TS 35X7.5 Without slot, Steel, galvanic zinc plated and passivated
Terminals	13 x A2C 4 + 5 x A2C 4 BL + 1 x A2C 4 PE + 9 x A2C 1.5
Communication/Signal elements	-
Terminal strip 2	
Horizontal installed	TS 35X7.5 Without slot, Steel, galvanic zinc plated and passivated
Power elements	1 x Contactor 4P-440V-25 A, Coil 220 VAC + 2 x 4P(2NO + 2NC)-440V 25A, Coil 230 V AC
Other elements	1 x TRS 24-230VUC 2CO + 1 x TS 65A-3 (mounted by final customer in field)
Terminal strip 3	
Horizontal installed	TS 35X7.5 Without slot, Steel, galvanic zinc plated and passivated
Terminals	1 x CB 3P-16A-C + 1 x RCCB 4P-25A-30mA - type B
Communication/Signal elements	-

Cabling	Communication connected
----------------	--------------------------------

Machining details			
Side A:			
Side B:	5x Ø 20 equipped with cable gland		
Side C:			
Side D:			
Side E:			
Side F:			

Declaration of Conformity	
Low Voltage Directive Standard	LVD 2014/35/EU IEC/EN 61439-1/2
Marking	CE