


3PH-Battery-Backup-Distribution for 1x Sunny Island French/Southern European version

enwitec-order-number	10013728
Customer-article-number	
Type designation	Battery-Backup-Distribution 3PH - prepared for retrofitting SMA - Energy Meter/Home Manager 2.0
Match code	3PH_IPC_SMA.SI_BBDAP_20KW_1PH_PREP_FR_1.0
Application	Battery-Backup Function - SMA "Flexible Storage System"
Battery-inverter	Sunny Island 4.4M-12 / -13 from firmware-version 1.00.xx.R Sunny Island 6.0H-12 / -13 from firmware-version 1.00.xx.R Sunny Island 8.0H-12 / -13 from firmware-version 1.00.xx.R
Grid structure	TT or TN-S system - Three Phase Sunny Island feed in: 1 phase! (=1 x Sunny Island)

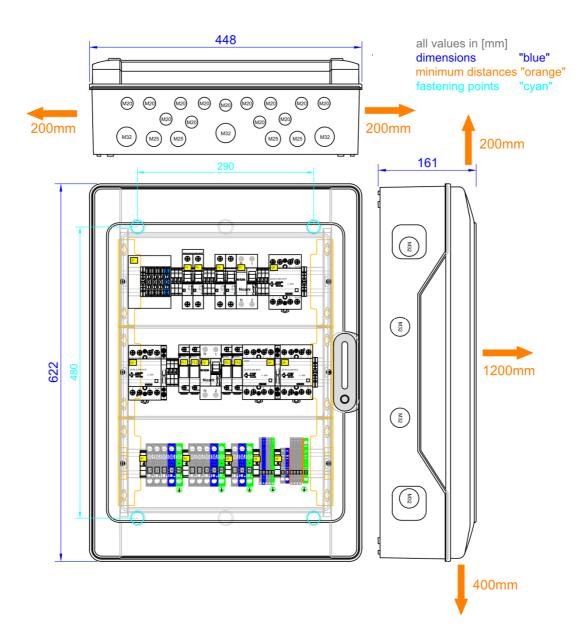


Page -1- von -5-

File: 19_09_24_data sheet_10013728_V1.1_en

3PH-Battery-Backup-Distribution for 1x Sunny Island French/Southern European version

SCOPE OF DELIVERY

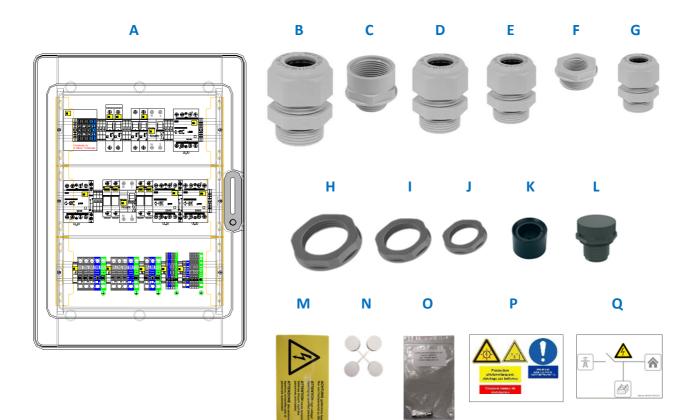

position	number	component
A	1	Battery Backup Distribution 10013728
В	2	Cable gland M40 x 1,5 (clamping range Ø 16 - 28mm)
С	2	Enlargement adaptor -M32 to M40-
D	3	Cable gland M32 x 1,5 (clamping range Ø 13 – 21mm)
E	2	Cable gland M25 x 1,5 (clamping range Ø 9 – 17mm)
F	1	Reduction adaptor -M20 to M12- (equalising membrane)
G	5	Cable gland M20 x 1,5 (clamping range Ø 6 – 13mm)
Н	3	Locknut M32
	2	Locknut M25
J	6	Locknut M20
К	1	Special sealing insert (CAT 5e cable "RJ45 Plug" -M25-)
L	1	Equalising membrane
Μ	1	Warning-label "high voltage"
Ν	4	Cover caps for fastening screws
0	3	Ferrule-fuse 10x38mm (either Littelfuse #KLKD-1A; Fast Acting)
		or Bussmann #KTK-1A; Fast Acting)
		4 pcs. inserted (Fuse-holders); 2 pc. as a spare-part
Р	1	Warning label C15-712
Q	1	Label - image "with reference to an island mode system ability"

Page -2- von -5-


File: 19_09_24_data sheet_10013728_V1.1_en



3PH-Battery-Backup-Distribution for 1x Sunny Island French/Southern European version

witec

CIRCUIT DIAGRAM

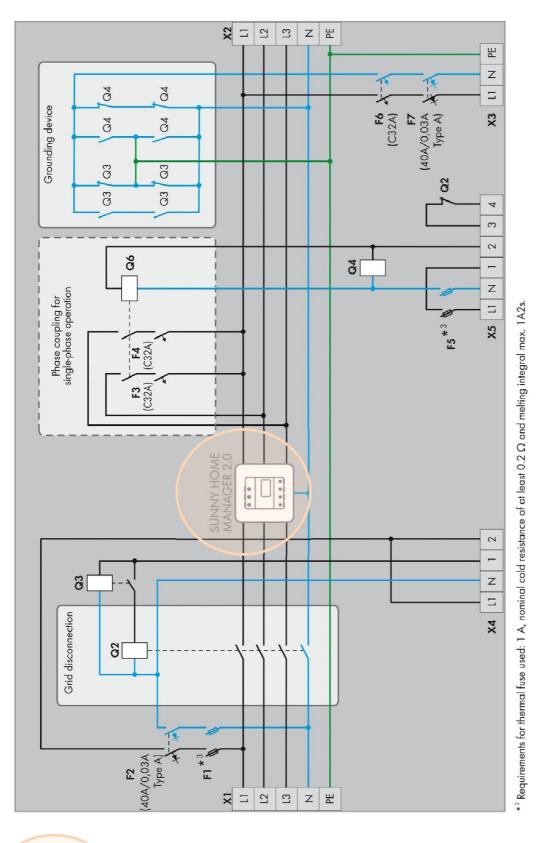


prepared for retrofitting: SMA - Energy Meter/Home Manager 2.0

Page -3- von -5-

File: 19_09_24_data sheet_10013728_V1.1_en

3PH-Battery-Backup-Distribution for 1x Sunny Island French/Southern European version

CIRCUITRY OVERVIEW

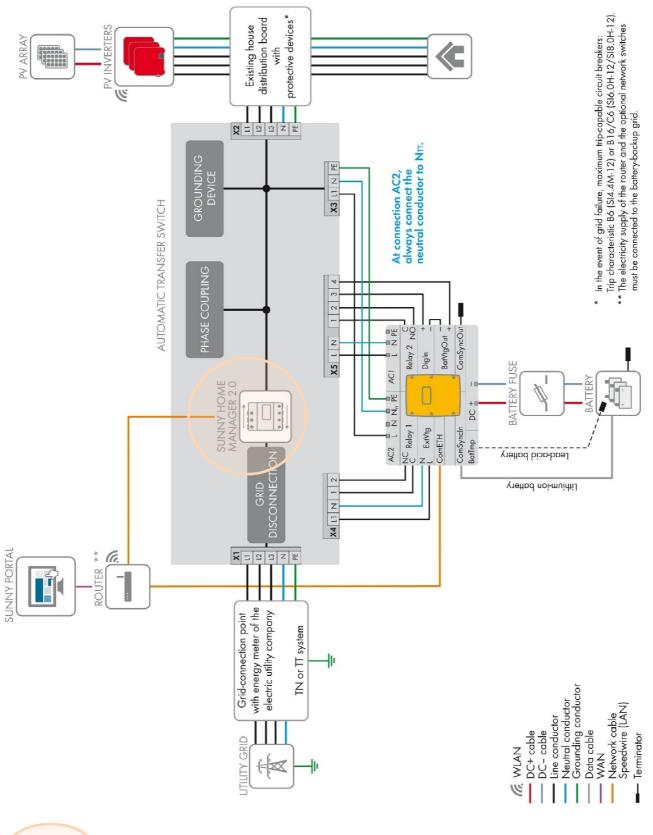

prepared for retrofitting: SMA - Energy Meter/Home Manager 2.0

Page -4- von -5-

File: 19_09_24_data sheet_10013728_V1.1_en



3PH-Battery-Backup-Distribution for 1x Sunny Island French/Southern European version

witec

TECHNICAL DATA

Rated operating v	oltage AC		[V]	3PH	- 230/400
Rated insulation voltage			[V]		400
Operating frequer	Operating frequency [Hz		[Hz]	50/60+/-5%	
Max. prospective	Max. prospective short circuit current [kA]				10
Permitted grid str	Permitted grid structure			TT / TN-S	
Max. value of pre-	1ax. value of pre-fuses[A]				63 A
Max. thermal pow	ver		[kW]		20
Standby-loss			[W]	(ca. 11
Circuit break	ers and fus	es			
F1.1 Ferrule fuse	10x38mm			1A; fast acting	
F1.2 Ferrule fuse	1.2 Ferrule fuse 10x38mm			1A; fast acting	
F2 RCD (residua	F2 RCD (residual current protective device)			Type A /40A-0,03A	
F3 MCB (circuit breaker - "C"-characteristic)					32A
F4 MCB (circuit breaker - "C"-characteristic)			32A		
F5.1 Ferrule fuse 10x38mm			1A; fast acting		
F5.2 Ferrule fuse 10x38mm				1A; fast acting	
F6 MCB (circuit breaker - "C"-characteristic; 2pole)			e)	32A	
F7 RCD (residual current protective device)		Туре А	/40A-0,03A		
Contactors					
IEC/EN 61095; IEC/EN60947-1; IEC 60947-5-1					
Q2 "grid disconne	ction"	AC	C1 [A]		63
Q3 "grounding de	Q3 "grounding device I" AC1 [A]			40	
Q4 "grounding device II" AC1 [A]			C1 [A]	40	
Q6 "phase coupling" AC1 [A]			63		
Control voltage			230V AC/DC		
Hum-free				yes	
Connections/terminals (spring-loaded terminals)					
Terminal block	Wire type	Cross section [mm ²] max.	Strip	ping length [mm]	Ferrule

Terminal block	wire type	[mm²] max.	[mm]	Ferrule
X1/X2/X3	solid stranded stranded	16 25 16	18-20	- - yes
X4	solid stranded stranded	2,5 2,5 2,5	8-9	- - yes
X5 (L1/N/PE)	solid stranded stranded	10 10 6	13-15	- - yes
X5 (1/2/3/4)	solid stranded stranded	2,5 2,5 2,5	8-9	- - yes

Cable glands

Size (metrical)	Clamping range [mm]
M32/M40	13-21/16-28
M20	6-13
M32/M40	13-21/16-28
M32	13-21
M20	6-13
M25	9-17
M20	6-13
	M32/M40 M20 M32/M40 M32 M20 M25



Observe the installation instructions!

General data

Dimensions (WxHxD)	[mm]	448x622x161
Weight	[kg]	11,5
Operating temperature range	[°C]	-25+40
Temperature - transport/storag	ge [°C]	-25+55
Temporary max. 24 hours	[°C]	70
Humidity-condensing allowed	•/-	-
Humidity – permitted range [%]	5 95
max. altitude above sea level	[m]	2000
Protection class IP	(EN 60529)	65
Outdoor-application permitted •/-		
Installation type		Indoor area
Protection against electric shoc (EN 61140)	Ш	
Case material		Polycarbonate
RoHS-conformity (2	2011/65/EU)	•
Colour of case		similar RAL7046
Way of mounting		wall mounting
cover		transparent
Locking system		without tool
Relevant standards		
Switching devices "distribution boards – operated people" (DBO)	EN 61439-1 EN 61439-2 EN 61439-3	
French - national standards	UTE C15-712 NF C15-100	
<u>Miscellaneous</u>		
Customer tariff number		85371098

File: 19_09_24_data sheet_10013728_V1.1_en