



# UN 38.3

# 检测报告 Test Report

☑新申请

□变更

□其他:

**New Application** 

Modification

Other:

报告编号: 20220905]25660

Report ID

样品名称: 可充电锂电池包

Sample Name Rechargeable Li-ion Battery System

型号规格: LX U5.4-20

Model/Type

51.2V 105Ah 5.4kWh

委托单位: 固德威技术股份有限公司

Applicant GoodWe Technologies Co., Ltd.



中认英泰检测技术有限公司 CQC Intime Testing Technology Co.,Ltd.



		则报告 REPORT	
报告编号: Report ID	20220906J25660		
样品名称: Sample Name	可充电锂电池包 Rechargeable Li-ion Battery System	商标: Trade Mark	GOODWE
型号规格: Model/Type	LX U5.4-20 51.2V 105Ah 5.4kWh	样品状态: Sample status	完好 Good
委托单位: Applicant	固德威技术股份有限公司 GoodWe Technologies Co., Ltd.		
地址: Applicant Address 生产单位: Manufacturer	苏州高新区紫金路90号 No.90 Zijin Rd., New District, Suzhou, 215011, China 固德威电源科技(广德)有限公司 Goodwe(Guangde)Power Supply Technology Co.,Ltd.		
地址: Manufacturer Address	安徽省宣城市广德经济开发区桐汭东路208号 No.208 East Tongrui Road,EDZ,Guangde City,Anhui Province,China		
试验单位: Test Lab	中认英泰检测技术有限公司 CQC Intime Testing Technology Co., Ltd		
地址: Lab Address	苏州吴中经济开发区吴中大道 1368号东太湖科技金融城 East Taihu Technology and Finance City, No.1368 Wuzhong Dadao Rd., Wuzhong Economic Development Zone, Suzhou, Jiangsu.		
试验标准: Standard Specification	《关于危险货物运输的建议书 试验和标准手册》第七版修订1第38.3节 Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria, ST/SG/AC.10/11/Rev.7/Amend.1/Section 38.3		
试验项目: Test Item	高度模拟;温度试验;振动;冲击;外部短路;挤压;过度充电;强制放电 Altitude Simulation, Thermal Test, Vibration, Shock, External Short Circuit, Crush, Overcharge, Force Discharge		
接样日期: 2022-9-9 Receiving Date		完成时间: 2022-10-17 Completing Date	
试验结论: Conclusion	所检样品符合上述标准要求 The Submitted Sample(s) Meet the F	Requirement of the Sta	ndard.
检测环境: Test Condition	环境温度: 20±5℃ Ambient temperature	·	MH
项目: Engineer	郭少波		A DATE OF THE PARTY OF THE PART
审核: Auditor	侯逢文 後達文		世CQCT中章 型 <b>检测专用章</b>
签发: Approver	赵润生 孟润生		放发日期。 Data of issue 2022-10-18

试验样品描述
Description of the sample

Description of the sample		
测试项目 Test Item	样品编号 Sample No.	样品状态 Sample State
T4 T5	B1~ B2	第1个充放电循环,完全充电状态 At first cycle, in fully charged states
T1~T5	B3~ B4	第25个充放电循环后,完全充电状态 After 25 cycles ending in fully charged states
Т6	C1~C5	第1个充放电循环,50%设计额定容量状态 At first cycle at 50% of the design rated capacity
10	C6~C10	第25个充放电循环后,50%设计额定容量状态 After 25 cycles ending at 50% of the design rated capacity
Т7	B5~ B6	第1个充放电循环,完全充电状态 At first cycle, in fully charged states
Т7	B7~ B8	第25个充放电循环后,完全充电状态 After 25 cycles ending in fully charged states
Т8	C11~C20	第1个充放电循环,完全放电状态 At first cycle, in fully discharged states
10	C21~C30	第25个充放电循环后,完全放电状态 After 25 cycles ending in fully discharged states

#### 备注 Remarks

1该样品为大型电池组

This sample is large battery

放电终止电压(V)

End of discharging voltage (V)

最大放电电流 (A)

Maximum discharge current(A)

电池芯容量(Ah)

Capacity of cell(Ah)

电池芯形状 Shape of cell 16

LF 105

(EVE)

1P16S

样品基本信息 Sample Fundamental Parameters			
项目 Item	参数 Parameters	项目 Item	参数 Parameters
额定容量(Ah) Rated capacity(Ah)	105	标称电压(V) Nominal voltage(V)	51.2
额定瓦特一小时(Wh) Watt-hour rating(Wh)	5400	充电限制电压 (V) Limited charge voltage(V)	57.6
充电电流 <b>(A)</b> Charge current(A)	50	最大连续充电电流 <b>(A)</b> Maximum continous charging current (A)	50
充电截止电流(mA) End charge current(mA)	3	放电电流 <b>(A)</b> Discharge current(A)	50

47.5

50

105

□袋装电池

Pouch Cell

□圆柱形 Φ≥18mm

CylindricalΦ≥18mm

■棱柱形

Prismatic

内含电池芯个数(个)

Cell numbers(pcs)

电池芯型号

Model of cell

电池芯排列方式

Permutation of cell

□圆柱形<18mm

CylindricalΦ<18mm

□纽扣电池

**Button Cell** 

样品图片 (Sample photograph) -1



样品图片 (Sample photograph) -2



样品图片 (Sample photograph) -3




样品图片 (Sample photograph) -4



样品图片 (Sample photograph) -5




样品图片 (Sample photograph) -6

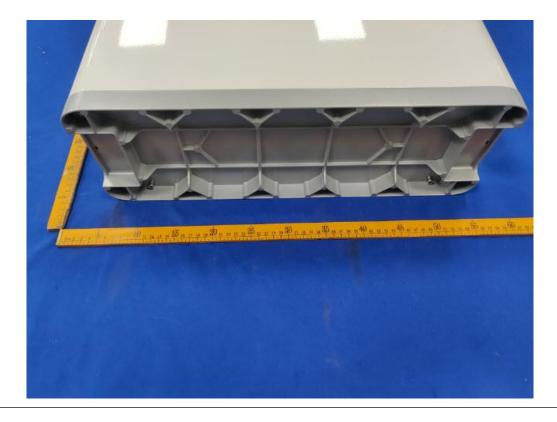

### 样品图片 (Sample photograph) -7



样品图片 (Sample photograph) -8

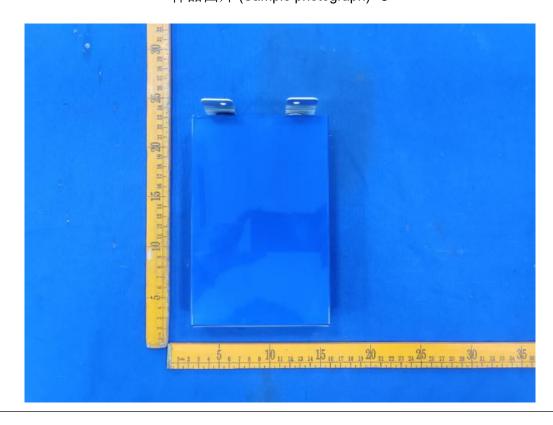

Report ID: 20220906J25660 Page 8 of 24

# 中认英泰检测技术有限公司

### CQC Intime Testing Technology Co.,Ltd 检测报告

### Test Report

检测结果 Test results

条款 Clause	38.3.4.1高度模拟试验 38.3.4.1 Altitude simulation
测试步骤	试验电池和电池组应在压力等于或低于11.6千帕和环境温度(20±5℃)下存放至少6小时。
Test Procedure	Test cells and batteries shall be stored at a pressure of 11.6 kPa or less for at least six hours at ambient temperature(20±5°C).
技术要求 Test requirement	不漏液、不泄放、不解体、不破裂、不着火(测试完电池的开路电压不小于测试前电压的90%,质量损失限值0.1%) No leakage, no venting, no disassembly, no rupture and no fire. The open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. Mass loss limit 0.1%.
检测结果 Test results	不漏液、不泄放、不解体、不破裂、不着火,具体数据详见附表1 No leakage, no venting, no disassembly, no rupture and no fire. Test data is shown in Annex 1.
结论 Pass/Fail Conclusion	P

Report ID: 20220906J25660 Page 9 of 24

# 中认英泰检测技术有限公司

### CQC Intime Testing Technology Co.,Ltd 检测报告

### Test Report

检测结果 Test results

条款	38.3.4.2温度试验
Clause	38.3.4.2 Thermal test
	试验电池和电池组应先在试验温度等于72±2℃的条件下存放至少6小时,接着再在试验
	温度等于-40 ± 2℃的条件下存放至少6小时。两个极端试验温度之间的最大时间间隔为30
	分钟。此程序重复进行,共完成10次,接着将所有试验电池和电池组在环境温度(20 ±
	5℃)下存放24小时。
测试步骤	对于大型电池和电池组,暴露于极端试验温度的时间至少应为12小时。
Test Procedure	Test cells and batteries are to be stored for at least six hours at a test temperature equal to $72 \pm 2^{\circ}$ C,
Troccaure	followed by storage for at least six hours at a test temperature equal to -40± 2°C. The maximum time
	interval between test temperature extremes is 30 minutes. This procedure is to be repeated until 10 total cycles are complete, after which all test cells and batteries are to be stored for 24 hours at ambient
	temperature (20± 5°C).
	For large cells and batteries the duration of exposure to the test temperature extremes should be at least 12 hours.
	不漏液、不泄放、不解体、不破裂、不着火(测试完电池的开路电压不小于测试前电压的
技术要求	90%,质量损失限值0.1%)
Test requirement	No leakage, no venting, no disassembly, no rupture and no fire. The open circuit voltage of each test
	cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. Mass loss limit 0.1%.
检测结果	不漏液、不泄放、不解体、不破裂、不着火,具体数据详见附表2
Test results	No leakage, no venting, no disassembly, no rupture and no fire. Test data is shown in Annex 2.
结论	
Pass/Fail	P
Conclusion	

### CQC Intime Testing Technology Co.,Ltd 检测报告

### Test Report

检测结果 Test results

条款	38.3.4.3 振动试验
Clause	38.3.4.3 Vibration
测试步骤 Test Procedure	电池和电池组紧固于振动机平台,但紧固程度不能造成电池变形以致不能准确传递振动。振动应是正弦波形,对数频率扫描从7Hz到200Hz,再回到7Hz,跨度为15分钟。对电池和小型电池组:从7 Hz开始,保持1gn 的最大加速度,直到频率达到18 Hz。然后将振幅保持在0.8 毫米(总偏移1.6 毫米),并增加频率直到最大加速度达到8 gn (频率约为50 Hz)。将最大加速度保持在8 gn 直到频率增加到200 Hz。对大型电池组:从7Hz开始,保持1 gn 的最大加速度,直到频率达到18Hz。然后将振幅保持在0.8 毫米(总偏移1.6 毫米),并增加频率直到最大加速度达到2 gn (频率约为25 Hz)。将最大加速度保持在2 gn 直到频率增加到200Hz。这一振动过程须对三个互相垂直的电池安装方位的每一方向重复进行12次,总共为时3小时。其中一个振动方向必须与端面垂直。Cells and batteries are firmly secured to the platform of the vibration machine without distorting the cells in such a manner as to faithfully transmit the vibration. The vibration shall be a sinusoidal waveform with a logarithmic sweep between 7 Hz and 200 Hz and back to 7 Hz traversed in 15 minutes. For cells and small batteries: from 7 Hz a peak acceleration of 1 gn is maintained until 18Hz is reached. The amplitude is then maintained at 0.8 mm(1.6 mm total excursion) and the frequency Increased until a peak acceleration of 8 gn occurs (approximately 50 Hz). A peak acceleration of 8 gn is then maintained until the frequency is Increased to 200 Hz For large batteries: from 7Hz to a peak acceleration of 1 gn is maintained until 18 Hz is reached. The amplitude is then maintained at 0.8 mm(1.6 mm total excursion) and the frecuency increased til a peak acceleration of 2 gn ocroxmmately 25 Hz). A peak acceleration of 2 gn is then maintained until the frequency is increased to 200Hz This cycle shall be repeated 12 times for a total of 3 hours for each of three mutually perpendicular mounting positions of the cell. One of the directions of vibration must be perpendicular to the teminal face.
技术要求 Test requirement	不漏液、不泄放、不解体、不破裂、不着火(测试完电池的开路电压不小于测试前电压的90%,质量损失限值0.1%) No leakage, no venting, no disassembly, no rupture and no fire. The open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. Mass loss limit 0.1%.
检测结果	不漏液、不泄放、不解体、不破裂、不着火,具体数据详见附表3
Test results	No leakage, no venting, no disassembly, no rupture and no fire. Test data is shown in Annex 3.
结论 Pass/Fail Conclusion	P

# CQC Intime Testing Technology Co.,Ltd

检测报告

### Test Report

检测结果 Test results

条款	38.3.4.4 冲击试验
Clause	38.3.4.4 Shock
	试验电池和电池组用坚固支架紧固在试验机上,支架支撑着每个试验电池组的所有安装面。
	每个电池须经受最大加速度150 gn 和脉冲持续时间6 毫秒的半正弦波冲击。大型电池须经
	受最大加速度50 gn 和脉冲持续时间11 毫秒的半正弦波冲击。
测试步骤 Test Procedure	小型电池组以峰值为 150gn(或与
技术要求	不漏液、不泄放、不解体、不破裂、不着火(测试完电池的开路电压不小于测试前电压的 90%,质量损失限值0.1%)
Test	No leakage, no venting, no disassembly, no rupture and no fire. The open circuit voltage of each test
requirement	cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. Mass loss limit 0.1%.
检测结果	不漏液、不泄放、不解体、不破裂、不着火,具体数据详见附表4
Test results	No leakage, no venting, no disassembly, no rupture and no fire. Test data is shown in Annex 4.
结论 Pass/Fail Conclusion	P

### CQC Intime Testing Technology Co.,Ltd 检测报告

### Test Report

检测结果 Test results

条款	38.3.4.5 外部短路
Clause	<b>38.3.4.5 External short circuit</b> 电池和电池组的外壳温度稳定在 <b>57±4℃</b> 后,在此温度下对电池进行外部短路,外电路的总
测试步骤 Test Procedure	阻值应小于0.1Ω,持续短路至样品外壳温度回落到57±4℃后至少再继续短路1 h;对于大型电池组,外壳温度降幅达试验中所观察的的最高温升幅的二分之一并保持低于该数值。电池电池组必须再观察6h结束试验。 The cell or battery to be tested shall be temperature stabilized so that its external case temperature reaches 57±4℃and then the cell or battery shall be subjected to a short circuit condition with a total external resistance of less than 0.1 ohm at 57 ±4℃. This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to 57±4℃. In the case of the large batteries, has decreased by half of the temperature increase observed during the test and remains below that value. The cell and battery must be observed for a further six hours for the test to be concluded.
技术要求	外壳温度不超过170℃,不解体、不破裂、不着火。
Test requirement	External temperature does not exceed 170°C. No disassembly, no rupture and no fire.
检测结果 Test results	外壳温度不超过170℃,不解体、不破裂、不着火,具体数据详见附表5
	External temperature does not exceed 170°C. No disassembly, no rupture and no fire. Test data is shown in Annex 5.
结论 Pass/Fail Conclusion	P

### CQC Intime Testing Technology Co.,Ltd 检测报告

### Test Report

检测结果 Test results

条款 Clause	38.3.4.6 撞击/挤压 38.3.4.6 Impact/Crush
测试步骤 Test Procedure	□撞击(适用于直径不小于18.0毫米的圆柱形电池) Impact(applicable to cylindrical cells not less than 18.0 mm in diameter) 将样品电池置于平板上,将一直径为15.8mm±0.1mm的不锈钢棒横放在样品中心,一块 9.1Kg±0.1Kg的重锤从61 ± 2.5 cm高度落到试样上。圆柱形电池受撞击时,其长轴应平行于平板并且垂直于放在受检电池中心的直径为 15.8mm的棒。每一试样只经受一次撞击,电池必须再观察6h结束试验。 The sample cell or component cell is to be placed on a flat smooth surface. A 15.8 mm ± 0.1mm diameter stainless steel bar is to be placed across the centre of the sample. A 9.1 kg ± 0.1 kg mass is to be dropped from a height of 61 ± 2.5 cm on to the sample.  The test sample is to be impacted with its longitudinal axis parallel to the flat surface and perpendicular to the longitudinal axis of the 15.8 mm ± 0.1mm diameter curved surface lying across the centre of the test sample. Each sample is to be subjected to only a single impact. The battery must be observed for a further six hours for the test to be concluded.  ■挤压(适用于棱柱形、袋装、硬币/组扣电池和直径小于18.0毫米的圆柱形电池)  Crush (applicable to prismatic, pouch, coin/button cells and cylindrical cells less than 18.0 mm in diammeter 将试样电池放在两个平面之间挤压,挤压力度逐渐增大,速度大约为1.5cm/s.挤压持续进行,直到出现以下三种情况之一: (a)施加的力量达到13kN±0.78kN;(b)电池的电压下降至少100mV;(c)电池变形达到原始厚度的50%或以上。棱柱形和袋装电池应从最宽的一面施压。硬币/组扣电池应从平坦表面施压。圆柱形电池应从与纵轴垂直的方向施压。每个试样电池只做一次挤压试验,电池必须再观察6h结束试验。 A cell or component cell is to be crushed between two flat surfaces. The crushing is to be gradual with a speed of approximately 1.5 cm/s at the first point of contact. The crushing is to be continued until the first of the three options below is reached. (a) The applied force reaches 13 kN ± 0.78 kN; (b) The voltage of the cell drops by at least 100 mV; or (c) The cell is deformed by 50% or more of its original thickness. A prismatic or pouch cell shall be crushed by applying the force to the widest side. A button/coin cell shall be crushed by applying the force on its flat surfaces. For cylindrical cells, the crush force shall be applied perpendicular to the longitudinal axis. Each test cell or component cell is to be subjected to one crush only. The battery must be observed for a further six hours for
技术要求 Test	外壳温度不超过170℃,不解体、不破裂、不着火。
requirement	External temperature does not exceed 170°C No disassembly, no rupture and no fire.
检测结果	外壳温度不超过170℃,不解体、不破裂、不着火,具体数据详见附表6
Test results	External temperature does not exceed 170°C. No disassembly, no rupture and no fire. Test data is shown in Annex 6.
结论 Pass/Fail Conclusion	P

### CQC Intime Testing Technology Co.,Ltd 检测报告

### Test Report

检测结果 Test results

条款	38.3.4.7 过度充电
Clause	38.3.4.7 Overcharge
测试步骤 Test Procedure	充电电流必须是制造商推荐的最大持续充电电流的两倍。试验的最小电压应为如下:  (a) 当制造商推荐的充电电压不超过18 V时,试验的最小电压应为2倍于电池的最大充电电压或为22 V二者中较小者; (b)当制造商推荐的充电电压超过18 V时,试验的最小电压应为最大充电电压的1.2倍。该试验应在环境温度下进行。进行试验的时间应为24 小时。在过充电结束后观察被检电池7天。 The charge current shall be the twice the manufactures recommended maximum continuous charge current. The minimum voltage of the test shall be follows:(a)When the manufactures recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the battery or 22V.(b)When the manufactures recommended charge voltage is more than 18V, the minimum voltage of the test shall be 1.2 times the maximum charge voltage. Tests are to be conducted at ambient temperature. The duration of the test shall be 24 hours. The test sample shall be observed for a further 7 days.
技术要求 Test requirement	不解体、不着火。 No disassembly, no fire.
检测结果	不解体、不着火,具体数据详见附表7
Test results	No disassembly, no fire. Test data is shown in Annex 7.
结论 Pass/Fail Conclusion	Р

### CQC Intime Testing Technology Co.,Ltd 检测报告

### Test Report

检测结果 Test results

条款	38.3.4.8 强制放电
Clause	38.3.4.8 Forced discharge
	电池在环境温度下与12V 直流电源串联连接,以电池制造商规定的最大持续放电电流作为初始电流强制放电。
测试步骤	将一个大小和功率合适的电阻负载与被检电池以及直流电源串联以获得规定的放电电流。每个电池强制放电的时间应等于其额定容量除以起始试验电流。在强制放电结束后观察被检电池 <b>7</b> 天。
Test Procedure	Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12V D.C. power supply at an initial current equal to the maximum discharge current specified by the manufacturer.
	The specified discharge current is to be obtained by connecting a resistive load of the appropriate size and rating in series with the test cell. Each cell shall be forced discharged for a time interval (in hours) equal to its rated capacity divided by the initial test current (in ampere). The test sample shall be observed for a further 7 days.
技术要求 Test requirement	不解体、不着火。 No disassembly, no fire.
检测结果	不解体、不着火,具体数据详见附表8
Test results	No disassembly, no fire. Test data is shown in Annex 8.
结论 Pass/Fail Conclusion	P

Report ID: 20220906J25660 Page 16 of 24

# 中认英泰检测技术有限公司 CQC Intime Testing Technology Co.,Ltd 检测报告 Test Report

附表1 高度模拟试验 Annex 1. Altitude Simulation

样品编号 Sample No.	试验前 Before test OCV <sub>1</sub> (V)	试验前 Before test M <sub>1</sub> (kg)	试验后 After test OCV₂(V)	试验后 After test M <sub>2</sub> (kg)	OCV₂/ OCV₁ (%)	质量损失 Mass Loss (%)	备注 Remarks
B1	52.50	55.80	52.50	55.80	100.00%	0.000%	-
B2	52.60	56.10	52.60	56.10	100.00%	0.000%	-
В3	53.00	56.05	53.00	56.05	100.00%	0.000%	-
B4	52.60	56.05	52.60	56.05	100.00%	0.000%	-
以下空白 Blank below							

Report ID: 20220906J25660 Page 17 of 24

# 中认英泰检测技术有限公司 CQC Intime Testing Technology Co.,Ltd 检测报告 Test Report

#### 附表2温度试验 Annex 2. Thermal test

样品编号 Sample No.	试验前 Before test OCV <sub>1</sub> (V)	试验前 Before test M <sub>1</sub> (kg)	试验后 After test OCV₂(V)	试验后 After test M₂(kg)	OCV <sub>2</sub> / OCV <sub>1</sub> (%)	质量损失 Mass Loss (%)	备注 Remarks
B1	52.50	55.80	52.50	55.80	100.00%	0.000%	-
B2	52.60	56.10	52.60	56.05	100.00%	0.089%	-
В3	53.00	56.05	53.00	56.00	100.00%	0.089%	-
B4	52.60	56.05	52.60	56.05	100.00%	0.000%	-
以下空白 Blank below							

Report ID: 20220906J25660 Page 18 of 24

# 中认英泰检测技术有限公司 CQC Intime Testing Technology Co.,Ltd 检测报告 Test Report

#### 附表3振动试验 Annex 3. Vibration

样品编号 Sample No.	试验前 Before test OCV <sub>1</sub> (V)	试验前 Before test M <sub>1</sub> (kg)	试验后 After test OCV₂ (V)	试验后 After test M <sub>2</sub> (kg)	OCV <sub>2</sub> / OCV <sub>1</sub> (%)	质量损失 Mass Loss (%)	备注 Remarks
B1	52.50	55.80	52.44	55.80	99.89%	0.000%	-
B2	52.60	56.05	52.50	56.05	99.81%	0.000%	-
В3	53.00	56.00	52.95	56.00	99.91%	0.000%	-
B4	52.60	56.05	52.51	56.05	99.83%	0.000%	-
以下空白 Blank below							

Report ID: 20220906J25660 Page 19 of 24

# 中认英泰检测技术有限公司 CQC Intime Testing Technology Co.,Ltd 检测报告 Test Report

#### 附表4冲击试验 Annex 4.Shock

样品编号 Sample No.	试验前 Before test OCV₁(V)	试验前 Before test M <sub>1</sub> (kg)	试验后 After test OCV₂(V)	试验后 After test M <sub>2</sub> (kg)	OCV <sub>2</sub> / OCV <sub>1</sub> (%)	质量损失 Mass Loss (%)	备注 Remarks
B1	52.44	55.80	52.44	55.80	100.00%	0.000%	-
B2	52.50	56.05	52.50	56.05	100.00%	0.000%	-
В3	52.95	56.00	52.95	56.00	100.00%	0.000%	-
B4	52.51	56.05	52.51	56.05	100.00%	0.000%	-
以下空白 Blank below							

Report ID: 20220906J25660 Page 20 of 24

# 中认英泰检测技术有限公司 CQC Intime Testing Technology Co.,Ltd 检测报告 Test Report

#### 附表5外部短路试验 Annex 5. External short circuit

样品编号 Sample No.	试验前电压 Voltage before test (V)	初始温度 Initial Temperature (℃)	最高温度 Max Temperature (℃)	备注 Remarks
B1	52.44	57.3	57.4	-
B2	52.50	56.9	56.9	-
В3	52.95	57.2	57.3	-
B4	52.51	57.1	57.1	-
以下空白 Blank below				

# 中认英泰检测技术有限公司 CQC Intime Testing Technology Co.,Ltd 检测报告 Test Report

#### 附表6撞击/挤压试验 Annex 6. Impact/Crush

样品编号 Sample No.	试验前电压 Voltage before test (V)	初始温度 Initial Temperature (℃)	最高温度 Max Temperature (℃)	备注 Remarks
C1	3.308	23.4	23.5	-
C2	3.302	23.2	23.3	-
С3	3.301	23.3	23.3	-
C4	3.305	23.5	23.6	-
C5	3.304	23.1	23.2	-
C6	3.308	23.5	23.6	-
C7	3.304	23.6	23.7	-
C8	3.306	23.4	23.4	-
C9	3.307	23.2	23.3	-
C10	3.305	23.4	23.5	-
以下空白 Blank below				

Report ID: 20220906J25660 Page 22 of 24

# 中认英泰检测技术有限公司 CQC Intime Testing Technology Co.,Ltd 检测报告 Test Report

#### 附表7过度充电试验 Annex 7.Overcharge

样品编号 Sample No.	试验前电压 Voltage before test (V)	初始温度 Initial Temperature (℃)	最高温度 Max Temperature (℃)	备注 Remarks
B5	52.68	23.4	23.5	-
B6	52.84	23.3	23.3	-
B7	52.25	23.0	23.0	-
B8	52.33	23.2	23.2	-
以下空白 Blank below				

# 中认英泰检测技术有限公司 CQC Intime Testing Technology Co.,Ltd 检测报告 Test Report

#### 附表8强制放电试验 Annex 8. Forced discharge

样品编号 Sample No.	试验前电压 Voltage before test (V)	初始温度 Initial Temperature (℃)	最高温度 Max Temperature (℃)	备注 Remarks
C11	3.082	23.4	46.3	-
C12	3.079	23.3	40.4	-
C13	3.081	23.1	43.6	-
C14	3.076	23.5	45.0	-
C15	3.089	23.3	46.3	-
C16	3.072	23.2	43.9	-
C17	3.086	23.3	48.2	-
C18	3.069	23.4	46.7	-
C19	3.084	23.5	45.2	-
C20	3.091	23.6	43.6	-
C21	3.083	23.5	40.9	-
C22	3.082	23.1	41.5	-
C23	3.088	23.5	46.3	-
C24	3.089	23.3	42.9	-
C25	3.076	23.3	46.8	-
C26	3.085	23.2	45.6	-
C27	3.870	23.6	43.2	-
C28	3.083	23.4	48.2	-
C29	3.096	23.5	43.6	-
C30	3.072	23.3	45.3	-
以下空白 Blank below				

——报告结束 End——

# 声明

#### Statement

1. 未经本机构书面批准不得部分复制本报告, 除非全部复制。

Don't copies the report partly, if you don't obtain the laboratory allow you to do that, unless you copy the whole report.

2. 检验结果仅对所检样品有效。

The test report is only valid to the sample which has been tested

3. 若对检测结果有异议,请在收到报告后十日内向本机构书面提出。

If you have any objection to the test result, please submit it to the laboratory in writing within 10 days after receiving the report.

4. 受检样品务必在收到检测报告三十日内领取,逾期本机构将作为废弃物自行处理。

The sample must be collected within 30 days after receiving the test report. The overdue sample will be disposed of as waste by the laboratory itself.

5. 此报告仅作为委托方参考,不作为诉讼、仲裁等依据。

This report only as a reference for client, can't be considered as a basis for litigation, arbitration and so on.

检测机构:中认英泰检测技术有限公司

Test Lab.: CQC Intime Testing Technology Co.,Ltd.

总部地址: 苏州市吴中经济开发区吴中大道1368号东太湖科技金融城

Headquarter address: East Taihu Hi-Tech & Finance Town, No.1368, Wuzhong Road, Wuzhong Economic Development Zone, Suzhou, China

邮政编码: 215104 电 话: 0512-66303621

传 真: 0512-66303625 E-mail: cqc\_jszlb@126.com

苏州胥口实验室地址: 胥口镇曹丰路236号

慈溪办事处地址:浙江省慈溪市水南路19号中央大厦北楼10层1020室

电话: 0574-63895313

深圳办事处地址:深圳市福田区新洲十一街139号中央西谷大厦13A层

电话: 0755-82889188-8118

广州办事处地址:广州市海珠区赤岗西路266号小聪科技园9楼

电话/传真: 020-84147422