


# 1PH-Battery-Backup-Distribution for 1x Sunny Island French/Southern European version

enwitec-order-number	10013676
Customer-article-number	
Type designation	Battery-Backup-Distribution 1PH - <u>prepared for retrofitting</u> SMA - Energy Meter/Home Manager 2.0
Match code	1PH_EPC_SMA.SI_BBDAP_12KW_1PH_PREP_FR_1.0
Application	Backup power - SMA "Flexible Storage System"
Battery-inverter	Sunny Island 4.4M-12 from firmware-version 1.00.xx.R Sunny Island 6.0H-12 from firmware-version 1.00.xx.R Sunny Island 8.0H-12 from firmware-version 1.00.xx.R
Grid structure	TT or TN-S system - Single Phase Sunny Island feed in: 1 phase! (=1 x Sunny Island)




Page -1- von -5- File: 19\_02\_08\_data sheet\_10013676\_V1.0\_en

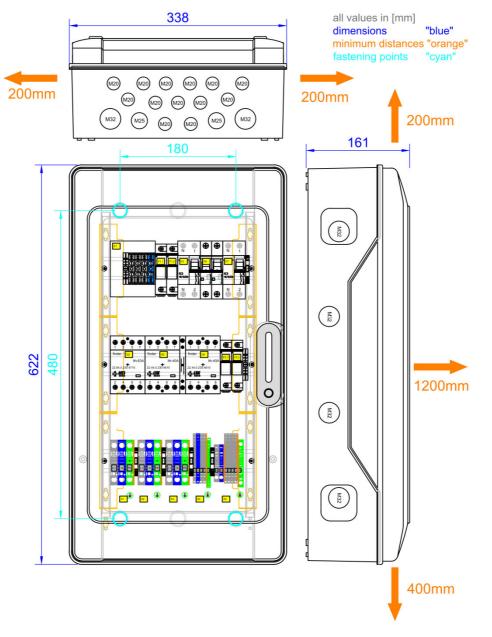

# 1PH-Battery-Backup-Distribution for 1x Sunny Island French/Southern European version

## **SCOPE OF DELIVERY**

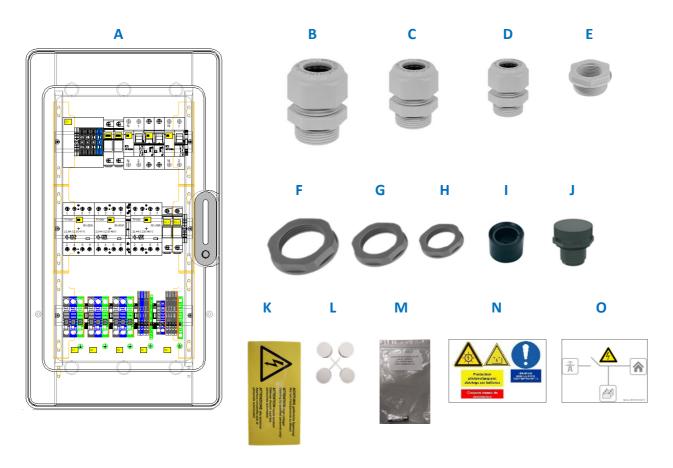


position	number	component	
Α	1	Battery Backup Distribution 10013676	
В	3	Cable gland M32 x 1,5 (clamping range Ø 13 – 21mm)	
С	2	Cable gland M25 x 1,5 (clamping range Ø 9 − 17mm)	
D	5	Cable gland M20 x 1,5 (clamping range Ø 6 − 13mm)	
E	1	Reduction adaptor -M20 to M12- (equalising membrane)	
F	3	Locknut M32	
G	2	Locknut M25	
Н	6	Locknut M20	
1	1	Special sealing insert (CAT 5e cable "RJ45 Plug" -M25-)	
J	1	Equalising membrane	
K	1	Warning-label "high voltage"	
L	4	Cover caps for fastening screws	
М	3	Ferrule-fuse 10x38mm (either Littelfuse #KLKD-1A; Fast Acting )	
		or Bussmann #KTK-1A; Fast Acting)	
		4 pcs. inserted (Fuse-holders); 2 pc. as a spare-part	
N	1	Warning label C15-712	
0	1	Label - image "with reference to an island mode system ability"	



## 1PH-Battery-Backup-Distribution for 1x Sunny Island French/Southern European version

#### **CIRCUIT DIAGRAM**

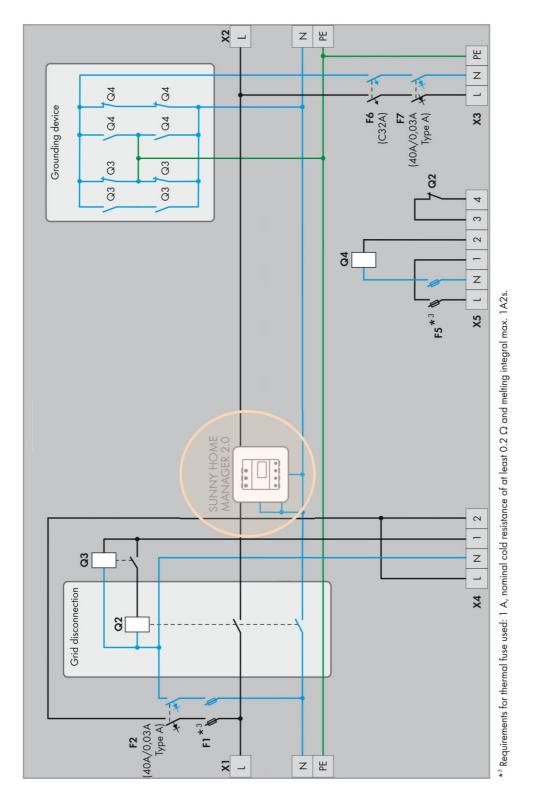




prepared for retrofitting: SMA - Energy Meter/Home Manager 2.0



## 1PH-Battery-Backup-Distribution for 1x Sunny Island French/Southern European version

#### **CIRCUITRY OVERVIEW**

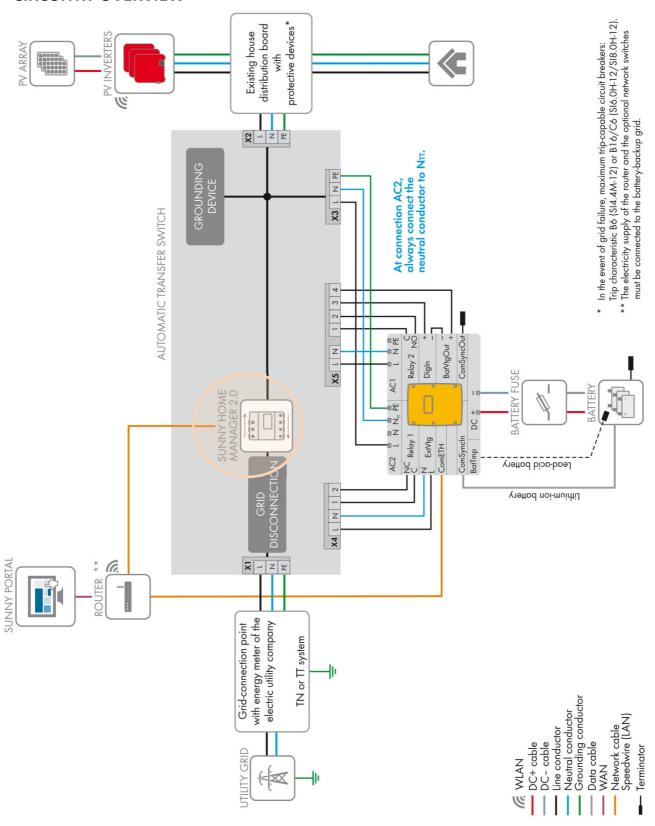



prepared for retrofitting: SMA - Energy Meter/Home Manager 2.0

Page -4- von -5-

File: 19\_02\_08\_data sheet\_10013676\_V1.0\_en



## 1PH-Battery-Backup-Distribution for 1x Sunny Island French/Southern European version

#### **TECHNICAL DATA**

Rated operating voltage AC	[V]	Single Phase-230
Rated insulation voltage	[V]	400
Operating frequency	[Hz]	50/60+/-5%
Max. prospective short circuit current	[kA]	10
Permitted grid structure		TT / TN-S
Max. value of pre-fuses	[A]	63 A
Max. thermal power	[kW]	12
Standby-loss	[W]	ca. 11

#### Circuit breakers and fuses

F1.1 Ferrule fuse 10x38mm	1A; fast acting
F1.2 Ferrule fuse 10x38mm	1A; fast acting
F2 RCD (residual current protective device)	Type A /40A-0,03A
F5.1 Ferrule fuse 10x38mm	1A; fast acting
F5.2 Ferrule fuse 10x38mm	1A; fast acting
F6 MCB (circuit breaker - "C"-characteristic; 2pole)	32A
F7 RCD (residual current protective device)	Type A/40A-0,03A

#### **Contactors**

IEC/EN 61095; IEC/EN60947-1; IEC 60947-5-1		
Q2 "grid disconnection"	AC1 [A]	63
Q3 "grounding device I"	AC1 [A]	40
Q4 "grounding device II"	AC1 [A]	40
Control voltage		230V AC/DC
Hum-free		yes

#### **Connections/terminals (spring-loaded terminals)**

Terminal block	Wire type	Cross section [mm²] max.	Stripping length [mm]	Ferrule
X1/X2/X3	solid stranded stranded	16 25 16	18-20	- - yes
X4	solid stranded stranded	2,5 2,5 2,5	8-9	- - yes
X5 (L1/N/PE)	solid stranded stranded	10 10 6	13-15	- - yes
X5 (1/2/3/4)	solid stranded stranded	2,5 2,5 2,5	8-9	- - yes

#### Cable glands

Terminal block	Size (metrical)	Clamping range [mm]	
X1	M32	13-21	
X1 PE	M20	6-13	
X2	M32	13-21	
Х3	M32	13-21	
X4	M20	6-13	
X5 "L1/N/PE"	M25	9-17	
X5 "1/2/3/4"	M20	6-13	





Observe the installation instructions!

#### **General data**

Customer tariff number

Dimensions (WxHxD)	[mm]	338x622x161	
Weight	[kg]	10,5	
Operating temperature range	[°C]	-25+40	
Temperature - transport/storage	[°C]	-25+55	
Temporary max. 24 hours	[°C]	70	
Humidity-condensing allowed	Humidity-condensing allowed •/-		
Humidity – permitted range [%]		5 95	
max. altitude above sea level	[m]	2000	
Protection class IP (	EN 60529)	65	
Outdoor-application permitted •/-		-	
Installation type		Indoor area	
Protection against electric shock (EN 61140)	II		
Case material	Polycarbonate		
RoHS-conformity (20	•		
Colour of case	similar RAL7046		
Way of mounting	wall mounting		
cover		transparent	
Locking system		without tool	
Relevant standards			
Switching devices  "distribution boards – operated by people" (DBO)	EN 61439-1 EN 61439-2 EN 61439-3		
French - national standards	UTE C15-712 NF C15-100		
Miscellaneous			